

# Three Phase Commercial Belt-Drive Blower Motor

## Open Dripproof, Air Over Not Required




### APPLICATIONS:

Designed to meet manufacturer's requirements for belt-drive blowers in commercial air conditioning applications where 3 phase power is required.

### FEATURES:

- Automatic Reset Thermal Overload Protector
- Reversible Rotation
- Continuous Duty
- Double Contact Sealed Ball Bearings
- Dual Voltage
- Class B Insulation
- 104°F (40°C) Ambient
- **Discount Symbol: DS-3HAC**

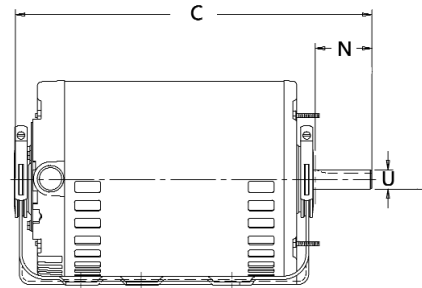

### Rigid Base Mount

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft Length (N)	Shaft Dia. (U)	SF	Total Length (C)	Ship Wgt.	Notes	OEM
1	1725	208-230/460	1813	\$450	Ball	56	3.4/1.7	1.9	.625	1.15	11.9	24	1	
1-1/2	1725	208-230/460	1814	\$508	Ball	56H	5.0/2.5	1.9	.625	1.15	12.4	27	1, 5	
	1725	200-230/460	7913	\$504	Ball	56HZ	5.0/2.5	2.3	.875	1.15	12.4	39		LE
2	1725	208-230/460	1815	\$554	Ball	56H	6.6/3.3	1.9	.625	1.15	12.4	29	1	
	1725	200-230/460	7914	\$539	Ball	56HZ	7.6-7.8/3.9	2.3	.875	1.15	12.4	45		LE
	1725	208-230/460	8461	\$762	Ball	145T	6.3-6.2/3.1	2.3	.875	1.00	12.5	37	2, 4, 6	
3	1725	200-230/460	7915	\$666	Ball	56HZ	9.0-9.2/4.6	2.3	.875	1.15	13.3	48		LE

### Resilient Mount

HP	RPM	Volts	Catalog Number	List	Bearings	NEMA Frame	Amps	Shaft Length (N)	Shaft Dia. (U)	SF	Total Length (C)	Ship Wgt.	Notes	OEM
1/3	1725	208-230/460	8496	\$377	Ball	56	1.5-1.6/0.8	1.9	.625	1.0	10.3	18	2, 3	
1/2	1725	208-230/460	8488	\$501	Ball	56	2.1-2.2/1.1	1.9	.625	1.25	10.3	20		
3/4	1725	208-230/460	8489	\$550	Ball	56	2.9-2.9/1.5	1.9	.625	1.25	10.8	22		
1	1725	208-230/460	8498	\$485	Ball	56	4.3/2.2	1.9	.625	1.25	11.3	26		
	1725	208-230/460	8460	\$516	Ball	56	3.0/1.5	1.9	.625	1.00	11.1	27	4	
1-1/2	1725	208-230/460	8490	\$609	Ball	56H	5.2-5.1/2.6	1.9	.625	1.15	12.8	32		
	1725	208-230/460	8491	\$781	Ball	145T	5.0-4.6/2.4	2.3	.875	1.15	13.2	40		
2	1725	208-230/460	8493	\$699	Ball	56H	6.1-6.3/3.1	1.9	.625	1.15	12.8	41		
	1725	208-230/460	8494	\$785	Ball	145T	6.1-6.3/3.1	2.3	.875	1.15	13.2	44		

LE = Lennox

Note 1 Quick Voltage Change Device  
 Note 2 Conduit Box  
 Note 3 5.6" Diameter

Note 4 Totally Enclosed Air Over  
 Note 5 Base Has Holes For 56 & 56H  
 Note 6 No Protector

C-FACE MOTORS  
 VARIABLE FREQUENCY  
 DRIVES  
 BRAKE MOTORS  
 GENERAL PURPOSE SINGLE PHASE  
 HVAC  
 WASHDOWN  
 AGRICULTURE  
 COMMERCIAL PUMP MOTORS  
 CLOSE COUPLED PUMP MOTORS  
 FIRE PUMP MOTORS  
 POOL & SPA MOTORS