

Shaded Pole & Permanent Split Capacitor Ventilation Direct Drive Blower 5.0", 5.6" & 6.3" Diameter, Open, Air Over




APPLICATIONS:

Designed to meet manufacturer's requirements for direct drive ventilation units.

FEATURES:

- Capacitor Included And Mounted On PSC Models
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- Ball Bearings Unless Noted
- 40°C Ambient Rated
- 1.0 Service Factor
- **Discount Symbol: DS-3HAC**

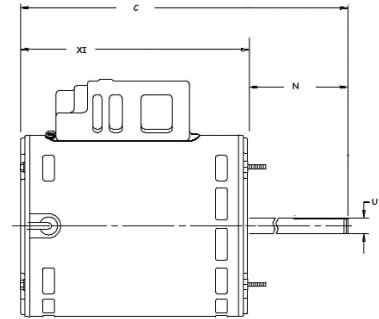

HP	RPM/ Spd.	Volts	Catalog Number	List	Amps	NEMA Frame	Motor Type	Shaft N	Shaft U	Rotation Lead End	Length XI	Total C	Ship Wgt.	Notes
1/6	1650	115	4742	\$122	2.7	42YZ	PSC	3.25	1/2	CW	5.81	9.06	10	
1/3	1650	115	4745	\$167	4.0	48YZ	PSC	3.25	1/2	CW	6.06	9.31	14	
1/2	1100	115/230	4749	\$218	6.2/3.1	48YZ	PSC	3.30	5/8	CCW	6.60	9.90	20	
	1650	115/230	4748	\$209	8.0/4.0	48YZ	PSC	3.25	5/8	CW	6.31	9.56	18	
3/4	1100	115/230	4750	\$235	10.0/5.0	48YZ	PSC	3.25	5/8	CCW	6.56	9.81	24	