


# Shaded Pole & PSC Direct Drive Fan 3.3" Diameter, Open and Totally Enclosed Designs

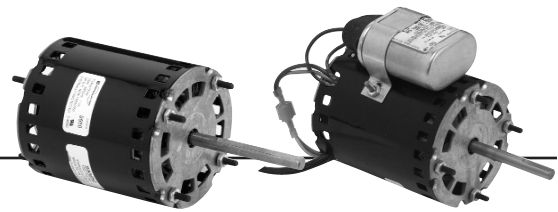


## APPLICATIONS:

Designed to meet manufacturer's requirements for fans & blowers.

## FEATURES:

- Four 8-32 x 3/4" Stud Extensions At Each End
- Ball Bearings Have All Angle Thrust System
- Automatic Reset Thermal Overload Protector
- PSC Design with Capacitor Included
- 12" Leads
- **Discount Symbol: DS-3HAC**



## Open Air Over

| HP        | RPM  | Volts   | Catalog Number | List  | Enclosure | Rotation Shaft End | Amps    | Shell XI | Shaft Dia. x N* | Ship Wgt. | Notes              |
|-----------|------|---------|----------------|-------|-----------|--------------------|---------|----------|-----------------|-----------|--------------------|
| 1/50      | 1550 | 115     | 9624           | \$63  | OAO       | Rev                | 0.70    | 2.46     | .25 x 2.50      | 3         | 5, 6               |
| 1/30      | 1550 | 115     | 9628           | \$64  | OAO       | Rev                | 1.20    | 3.00     | .31 x 2.50      | 4         | 5, 6               |
| 1/20      | 1550 | 115     | 9632           | \$65  | OAO       | Rev                | 1.80    | 3.15     | .31 x 2.38      | 4         | 5, 6               |
| 1/12-1/20 | 1550 | 115/230 | 9664           | \$111 | OAO       | Rev                | 1.3/0.7 | 4.15     | .31 x 2.50      | 4         | 5, 6 <b>RESCUE</b> |
| 1/10      | 1550 | 230     | 9657           | \$176 | OAO       | Rev                | 1.00    | 4.5      | .31 x 3.75      | 6         | 6, 7               |

## Totally Enclosed Air Over

| HP   | RPM  | Volts | Catalog Number | List | Enclosure | Rotation Shaft End | Amps | Shell XI | Shaft Dia. x N* | Ship Wgt. | Notes |
|------|------|-------|----------------|------|-----------|--------------------|------|----------|-----------------|-----------|-------|
| 1/50 | 1550 | 115   | 9642           | \$68 | TEAO      | CW                 | 0.70 | 2.46     | .25 x 2.25      | 3         | 5     |
|      | 1550 | 115   | 9641           | \$68 | TEAO      | CCW                | 0.70 | 2.46     | .25 x 2.25      | 3         | 5     |

## OEM Direct Replacements, Open Air Over

| HP        | RPM  | Volts       | Catalog Number | List  | Bearings | Cap. MFD | Amps      | Shell XI | Shaft Dia. x N* | Ship Wgt. | Notes   | OEM              |
|-----------|------|-------------|----------------|-------|----------|----------|-----------|----------|-----------------|-----------|---------|------------------|
| 1/20      | 1550 | 115         | 9662           | \$115 | OAO      | CCW      | 1.3       | 4.2      | 0.31 X 3.0      | 4         | 1, 4, 5 | BO               |
|           | 1550 | 208-230     | 9648           | \$80  | OAO      | CW       | 0.87      | 3.15     | 0.31 x 2.25     | 4         |         | FE               |
|           | 1550 | 115/208-230 | 9654           | \$120 | TEAO     | CW       | 1.50/0.75 | 3.4      | 0.31 x 1.63     | 4         | 2, 5    | KR               |
|           | 1550 | 115/230     | 9663           | \$189 | OAO      | CCW      | 1.4/0.7   | 4.1      | 0.31 X 1.6      | 4         | 2, 5    | KR               |
|           | 1550 | 230         | 9655           | \$95  | OAO      | CW       | 0.81      | 3        | 0.31 x 2.25     | 4         | 1       | KT               |
| 1/15      | 1550 | 208-230     | 9656           | \$112 | OAO      | CCW/Rev  | 0.60      | 4.15     | 0.31 x 2.56     | 4         | 1, 4, 5 | BO               |
| 1/12-1/20 | 1550 | 115/230     | 9664           | \$111 | OAO      | CW/Rev   | 1.3/0.7   | 4.15     | 0.31 x 2.5      | 4         | 4, 5    | BO <b>RESCUE</b> |

FE = Fedders      KR = Krack      KT = Kramer-Trenton

Note 1 Includes Special Cord And Plug  
 Note 2 Includes Special Mounting Lugs, No Threaded Studs  
 Note 3 Includes Conduit Box Mounted On Side Of Motor  
 Note 4 PSC With Capacitor  
 Note 5 Ball Bearings  
 Note 6 PSC, Capacitor included and attached  
 Note 7 Includes Hex Mounting Hub Both Ends  
 \*As Measured From Motor Face