


# Shaded Pole & Permanent Split Capacitor Unit Heater Fan 5.0", 5.6" & 6.3" Diameter, Totally Enclosed, Air Over

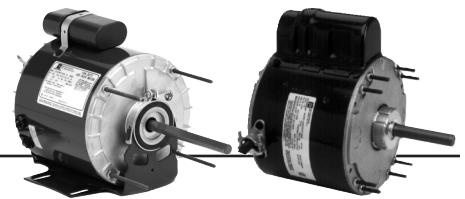

## APPLICATIONS:

Designed to meet manufacturer's requirements for use on unit heaters.

## FEATURES:

- Continuous Duty, Air Over
- Reversible Motors Are Easily Reversed With Quick Connects
- 2-1/2" Diameter Hub Rings When Furnished
- Automatic Reset Thermal Overload Protector
- Green Ground Lead
- 48 Frame Has 8-32 NF-2A Thread; 56 Frame Has 10-32 NF-2A Thread
- 370V Capacitor Is Furnished
- Leads Are SJO Cord
- Extended Mounting Studs
- **Discount Symbol: DS-3HAC**




Figure A




Figure B

## Stud Mount, Single Speed (Fig. A)

| HP  | RPM/Spd. | Volts | Catalog Number | List  | Diameter (In.) | Cap. MFD | Amps | Shaft N | Base XD | Shell XI | Total C | Stud YM | Ship Wgt. | Notes |
|-----|----------|-------|----------------|-------|----------------|----------|------|---------|---------|----------|---------|---------|-----------|-------|
| 1/6 | 1075     | 115   | 9034           | \$205 | 5.6            | 4.0      | 2.6  | 2.5     | 4.9     | 4.3      | 7.9     | 0.8     | 12        |       |
| 1/4 | 1075     | 115   | 9035           | \$223 | 5.6            | 5.0      | 3.6  | 2.5     | 5.8     | 5.1      | 8.7     | 0.8     | 15        |       |
| 1/3 | 1075     | 115   | 9036           | \$227 | 5.6            | 4.0      | 5.1  | 2.5     | 5.8     | 5.1      | 8.7     | 0.8     | 15        |       |

## Stud Mount, Two Speed (Fig. A)

| HP  | RPM/Spd. | Volts | Catalog Number | List  | Diameter (In.) | Cap. MFD | Amps | Shaft N | Base XD | Shell XI | Total C | Stud YM | Ship Wgt. | Notes |
|-----|----------|-------|----------------|-------|----------------|----------|------|---------|---------|----------|---------|---------|-----------|-------|
| 1/6 | 1075/2   | 115   | 4856           | \$259 | 5.6            | 4.0      | 2.4  | 5.0     | 4.6     | 4.3      | 10.4    | 2.5     | 12        | 64    |
| 1/3 | 1075/2   | 115   | 1052           | \$246 | 5.6            | 4.0      | 4.6  | 5.0     | 5.4     | 4.9      | 10.9    | 2.5     | 14        | 64    |

## Resilient Base (Fig. B)

| HP  | RPM/Spd. | Volts | Catalog Number | List  | Diameter (In.) | Cap. MFD | Amps | Shaft N | Base XD | Shell XI | Total C | Stud YM | Ship Wgt. | Notes |
|-----|----------|-------|----------------|-------|----------------|----------|------|---------|---------|----------|---------|---------|-----------|-------|
| 1/3 | 1075     | 230   | 1048           | \$242 | 5.6            | 10.0     | 1.8  | 2.8     | 5.9     | 4.9      | 8.7     | --      | 17        | H14   |
| 1/2 | 1075/2   | 230   | 1810           | \$404 | 6.3            | 10.0     | 2.5  | 4.9     | 7.5     | 6.3      | 12.8    | 2.5     | 26        |       |
| 3/4 | 1075/2   | 230   | 1811           | \$409 | 6.3            | 12.5     | 3.7  | 4.9     | 8.5     | 7.3      | 13.8    | 2.5     | 34        |       |

Note 64 Capacitor shipped detached

Note H14 Capacitor mounted OSE, 3/8" shaft



DRIVES  
BRAKE MOTORS  
GENERAL PURPOSE SINGLE PHASE  
HVAC  
WASHDOWN  
AGRICULTURE  
COMMERCIAL PUMP MOTORS  
CLOSE COUPLED PUMP MOTORS  
FIRE PUMP MOTORS  
POOL & SPA MOTORS  
RESIDENTIAL WATER PUMP  
ELEVATOR AND GATE & DOOR