


Permanent Split Capacitor Direct Drive Fan & Blower

5.6" Diameter, Open, Air Over, High Efficiency

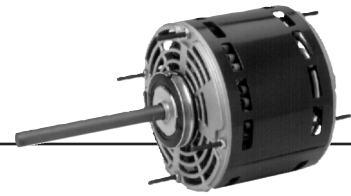


APPLICATIONS:

Designed to meet manufacturer's requirements for use on direct drive fans & blowers.

FEATURES:

- Reversible Unless Noted
- Class B Insulation
- Sleeve Bearings Have All Angle Thrust System
- Continuous Duty, Air Over
- Designed For Use With 370V Capacitors
- 36" Line Leads Unless Otherwise Noted
- High Efficiency Economizer® Motors
- Automatic Reset Thermal Overload Protector
- Connection and Capacitor Information Furnished in the Nameplate Data
- When Furnished, the Capacitor and Its Mounting Hardware is Supplied Detached
- 2.5" Dia. Hub Rings Included – See Notes
- **Discount Symbol: DS-3HAC**



Stud or Hub Ring Mount (2.5"), Single Speed

HP	RPM/ Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/3	825	208-230	6873	\$267	Ball	5.0	3.0	4.5	6.4	5.8	11.4	N/A	17	H10	

Stud or Hub Ring Mount (2.5"), Two Speed

HP	RPM/ Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/4	1625/2	460	8944	\$412	Ball	5.0	0.8	6.0	N/A	4.6	10.6	0.8	13		
1/3	1075/2	460	8945	\$472	Ball	5.0	1.3	6.0	5.3	4.8	11.9	0.8	14	64	
3/4	1075/2	460	8947	\$504	Ball	20.0	2.1	6.0	6.1	5.6	12.7	0.8	21	64	

Stud or Hub Ring Mount (2.5"), Three Speed

HP	RPM/ Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
3/4	1075/3	460	8056	\$403	Slv	20.0	2.3	2.5	5.8	5.3	8.4		19	62	LE
1	1100/3	460	2553	\$401	Slv	25.0	3.3	3.5	-	6.8	10.3	N/A	20	62, H11	YK

Four Speed

HP	RPM/ Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/6	1075/4	115	5825	\$140	Slv	4.0	2.2	6.0	4.6	4.1	11.1	1.5	11	H1	
	1075/4	208-230	5826	\$141	Slv	5.0	1.1	6.0	4.6	4.1	11.1	1.5	11	H1	
1/4	1075/4	115	5830	\$141	Slv	5.0	3.8	6.0	4.9	4.4	11.4	1.5	12	H1	
	1075/4	208-230	5831	\$145	Slv	5.0	1.8	6.0	4.9	4.4	11.4	1.5	12	H1	
1/3	1075/4	115	5835	\$159	Slv	7.5	4.6	6.0	5.4	4.9	11.9	1.5	13	H1	
	1075/4	208-230	5836	\$160	Slv	6.0	2.3	6.0	5.2	4.7	11.7	1.5	13	H1	
1/2	1075/4	115	5840	\$171	Slv	7.5	7.1	6.0	5.8	5.3	12.4	1.5	19	H1	
	1075/4	208-230	5841	\$183	Slv	7.5	3.3	6.0	5.6	5.1	12.2	1.5	19	H1	
3/4	900/4	115	1125	\$289	Slv	10.0	11.9	4.0		6.6	10.6		20	62, H11	IC
	1075/4	115	5845	\$227	Slv	15.0	10.6	6.0	6.2	5.7	12.7	1.5	20	H1	
	1075/4	115	3275	\$246	Ball	40.0	10.0	2.5	5.9	5.4	8.9		17	H2	LE
	1075/4	115	5463	\$272	Ball	15.0	10.6	5.0	-	5.8	10.8		20	62, 72	RH
	1075/4	208-230	5846	\$239	Slv	10.0	5.1	6.0	6.2	5.7	12.7	1.5	20	H1	
1	1100/4	208/230	4670	\$277	Slv	20.0	6.0	5.0		6.3	11.3		20	62, 84, H11	IC

IC = ICP LE = Lennox RH = Rheem YK = York

Note 64 Includes Capacitor Unmounted

Note 62 Not Economizer®

Note 72 Includes 4 Holes In Shell For Rheem Mount

Note 84 Non-Reversible

Note H1 2.25" Dia. Hub Rings With Kit For 2.5" Included

Note H2 2.5" Hub Rings

Note H10 50" Line Leads

Note H11 Band Mount

† All marks shown within this document are properties of their respective owners



DRIVES
BRAKE MOTORS
GENERAL PURPOSE SINGLE PHASE
HVAC
WASHDOWN
AGRICULTURE
COMMERCIAL PUMP MOTORS
CLOSE COUPLED PUMP MOTORS
FIRE PUMP MOTORS
POOL & SPA MOTORS
RESIDENTIAL WATER PUMP
ELEVATOR AND GATE & DOOR