



U.S. MOTORS® makes it easy to find the right, energy-efficient replacement motor.

Airports are energy-intensive operations. Baggage systems alone are powered by hundreds of electric motors constituting a large electric load. Add to baggage; escalators, people-movers and HVAC systems—all motor driven—and you have significant opportunity for maintenance reduction and energy savings by selecting energy efficient U.S. MOTORS® brand replacement motors.

Nidec Motor Corporation offers a full line of fractional and integral motors to keep your systems running smoothly and without downtime. Our line spans every airport system from baggage handling to HVAC motors for indoor air quality and comfort.

Looking for direct replacement motors? Look no further. The U.S. MOTORS line offers an extensive portfolio of replacements and we have the tools—both eBusiness, and motor specifications and technical data—to connect you with the right motor quickly at www.usmotors.com/OnLine-Catalog.aspx:

- Competitive cross reference tools
 - More than 50,000 cross references by competitor or OEM catalog and model numbers.
- eCatalog search tool (search by ID, features or applications)
- Online chat
- Dimension prints
- Nameplate data
- 3D models
- Performance data
- Wiring diagrams
- Installation and maintenance manuals



The U.S. MOTORS line of products, as well as a full complement of production and facilities maintenance solutions, is available locally and throughout the world:

- On hand inventory at local distributors
- Authorized service stations—warranty and repair

If you have questions, e-mail us at FacilityMRO@nidec-motor.com

Airline Industry

Facilities Maintenance Electric Motor Guide



FRACTIONAL AND INTEGRAL REPLACEMENT MOTORS


Nidec Motor Corporation, 2012. All Rights Reserved.
U.S. MOTORS® is a registered trademark of Nidec Motor Corporation.
Nidec Motor Corporation trademarks followed by the ® symbol are registered with the U.S. Patent and Trademark Office.



8050 W. Florissant Avenue | St. Louis, MO 63136
Phone: 888-637-7333 | Fax: 866-422-7758
www.nidec-motor.com | www.usmotors.com



We make it EASY for you to find and purchase U.S. MOTORS® brand replacement motors!

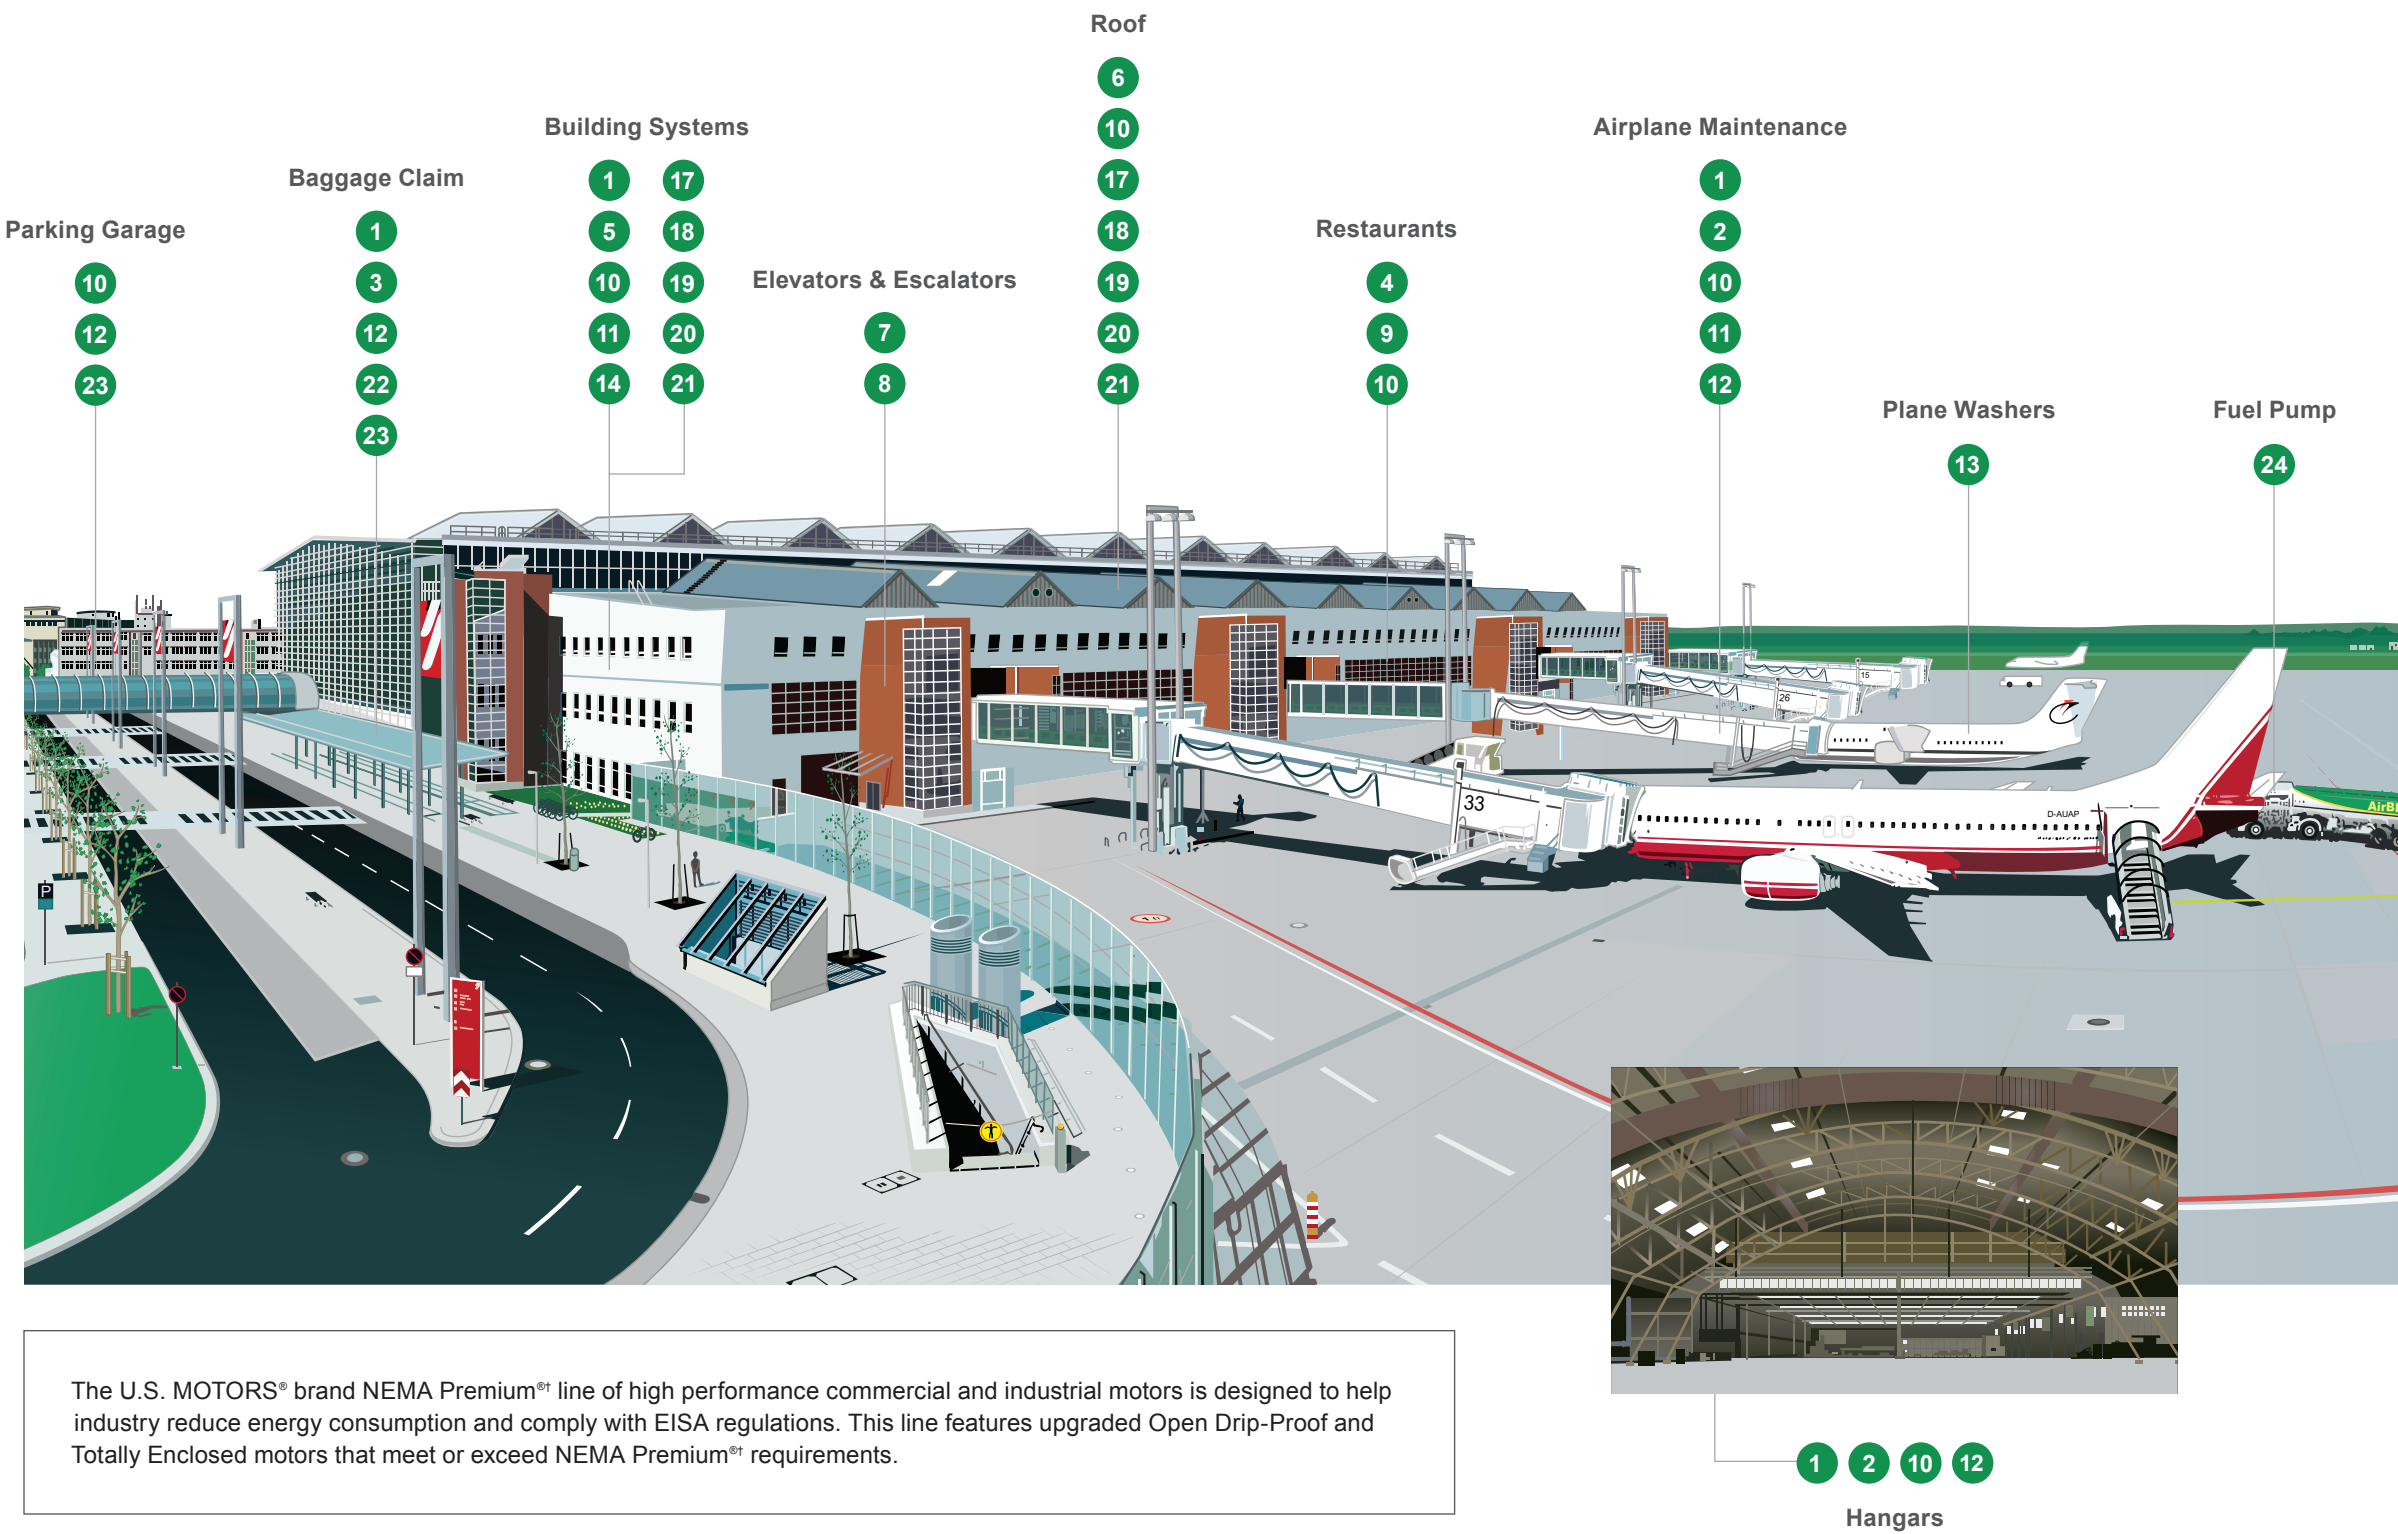

Product Overview (listed in alphabetical order)

1 Air Circulator Motors

- Single Phase, OAO and TEAO
- 1/15, 1/10 HP and 1/4 – 1/2 HP
- 1800, 1200, and 900 RPM
- 42 – 56 Frame
- Single and two speed options
- Oscillating and non-oscillating options



2 Air Compressor

- Single Phase, ODP
- 1/2 – 5 HP
- 3600 RPM
- 56, 143 and 184 Frame
- High breakdown torque



3 C-Face: ODP, TEFC and Hazardous Location

- Single Phase, Split Phase & Capacitor Start
- Three Phase, Footed and Footless options
- 1/12 – 60 HP
- 3600, 1800 and 1200 RPM
- 56 – 326 Frame
- Standard, Energy and Premium Efficient



4 Carbonator Pump

- Single Phase, ODP
- 1/4 – 1/2 HP
- 1800 RPM
- 48 Frame



5 Close Coupled Pump

- Single and Three Phase, ODP, TEFC and Hazardous Location
- 1 – 60 HP
- 3600 and 1800 RPM
- 143 – 326 Frame
- JM and JP shafts available



6 Cooling Tower

- Three Phase, TEFC and TEAO
- 2 – 100 HP
- 1800, 1200, 1800/900 and 1200/600 RPM
- 145 – 447 Frame
- Single and two speed
- Energy efficient and NEMA Premium®/inverter duty
- Meets specifications for Baltimore Aircoil Company®, Evapco® and Marley® cooling tower motors



7 Elevator Duty: Dry Hydraulic

- Three Phase
- 3 – 75 HP
- 3600, 1800 and 1200 RPM
- Z and L32 flange mounting



8 Elevator Duty: Submersible

- Single and Three Phase
- 3 – 75 HP
- 3600, 1800 and 1200 RPM
- Z and L32 flange mounting



9 Evaporative Cooler

- Single Phase, ODP
- 1/3–1 HP
- 1725 RPM
- 56 Frame
- Single and two speed
- Corrosion resistant rotor core and actuator assembly



10 Fan and Blower

- Single Phase, ODP, OAO and TEAO
- 1/6 – 1-1/2 HP
- 3450, 1725, 1075 and 825 RPM
- Single, two, three and four speed
- Belt drive and direct drive



11 Fire Pump Motor

- Three Phase, ODP
- 7-1/2 – 250 HP
- 3600 and 1800 RPM
- 184 – 445 Frame
- UL® listed for fire pump application
- Available in horizontal frame and vertical JP close coupled pumps



12 Gate and Door Motors

- Single and Three Phase, ODP and TEFC
- 1/3 – 1 HP
- 1800 RPM
- 56 and 56C Frame



13 General Purpose Single Phase, Capacitor Start TEFC C-Face

- 1/12 – 2 HP
- 3600, 1800 and 1200 RPM
- 56 and 145 Frame
- C-Face Footed and Footless



14 Hot Water Circulator Pump

- Single and Three Phase, ODP
- 1/12 – 1-1/2 HP
- 1800 RPM
- 48 and 56 Frame
- Direct replacement motor for B&G®† (Bell & Gossett), Taco®† and Thrush™† brand circulator pumps



15 ODP and TEFC, Single Phase, Capacitor Start

- 1/8 – 10 HP
- 3600, 1800 and 1200 RPM
- 48 – 215 Frame
- Rigid welded and cradle bases
- C-Face Footed and Footless
- Automatic or manual reset thermal overload protector options



16 ODP and TEFC, Single Phase, Split Phase

- 1/12 – 3/4 HP
- 3600, 1800, 1200 and 900 RPM
- 48 – 56 Frame
- Rigid welded and cradle bases
- Single and two speed options
- C-Face Footed and Footless
- Automatic or manual reset thermal overload protector options



17 ODP, Three Phase

- 1/4 – 400 HP
- 3600, 1800, 1200 and 900 RPM
- 48 – 449 Frame
- Energy and NEMA Premium®† efficient



18 TEFC, Three Phase, 841 PLUS®

- 1 – 400 HP
- 3600, 1800 and 1200 RPM
- 143 – 447 Frame
- Meets IEEE® 841 GM7E-TA specifications
- Five-year limited warranty*
- NEMA Premium®† efficient
- VBXX®† bearing isolators by Inpro/Seal®† help protect bearings



19 TEFC, Three Phase, CORRO-DUTY®

- 1 – 400 HP
- 3600, 1800 and 1200 RPM
- 143 – 447 Frame
- All cast iron construction
- NEMA Premium®† efficient



20 TEFC, Three Phase, HOSTILE DUTY™

- 1 – 350 HP
- 3600, 1800, 1200 and 900 RPM
- 143 – 449 Frame
- Energy and NEMA Premium®† efficient
- Cast iron frame and brackets
- Ball and roller bearing options



21 TEFC, Three Phase, UNIMOUNT®

- 1/4 – 30 HP
- 3600, 1800, 1200 and 900 RPM
- 56 – 286 Frame
- Energy and NEMA Premium®† efficient
- C-Face, Footed and Footless and removable base



22 UNIMOUNT® Brake Motor

- Three Phase, TEFC with Brake Added
- 1/3 – 20 HP
- 1800 and 1200 RPM
- 56 – 256 Frame
- Rigid base, C-Face, Footed and Footless



23 Unit Heater

- Single Phase, TEAO
- 1/15 – 3/4 HP
- 1550 and 1075 RPM
- 48 and 56 Frame
- Cradle and stud mount



24 Vertical Pump Motors

- Three Phase, WPI, WPPI, TEFC and Hazardous Location
- 3 – 4000 HP
- 3600, 1800, 1200, 900, 720, 600 and 514 RPM
- 182 – 6810 Frame
- Designed for high or normal thrust
- Available in vertical HOLLOSHAFT® and vertical solid shaft



†All marks shown within this document are properties of their respective owners.
*For details, refer to: www.usmotors.com